



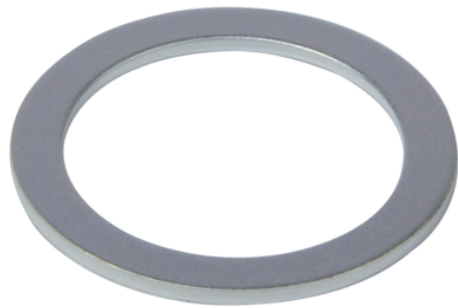

Copper gasket, silver-plated, vacuum-annealed, DN 63 CF

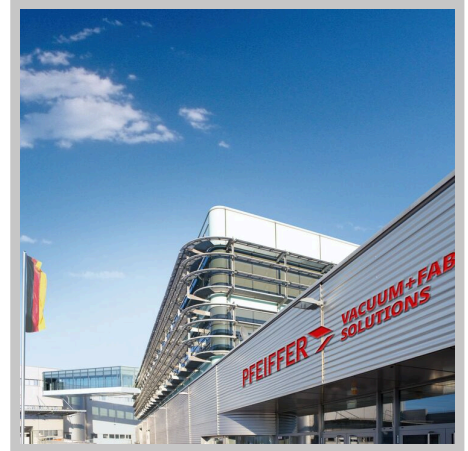

PFEIFFER 

Copper gasket

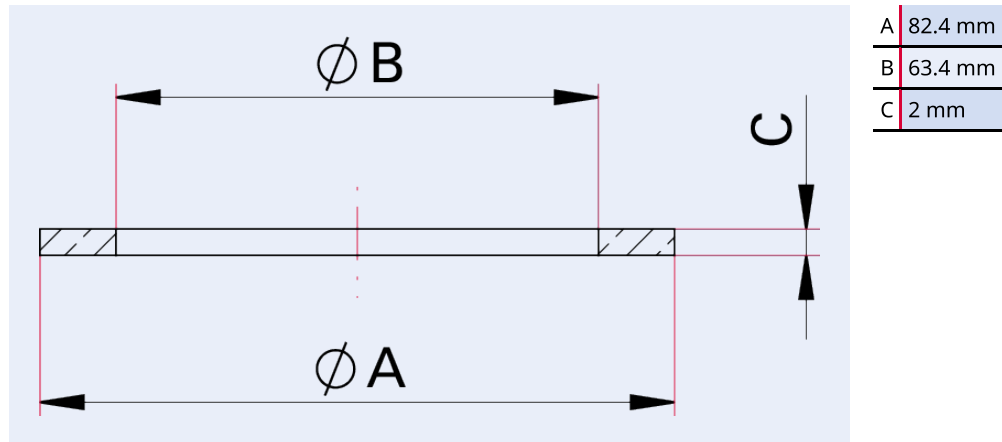


Illustration only

Copper gasket, silver-plated, vacuum-annealed, DN 63 CF

- Soft annealed under vacuum and silver plated
- Particularly well suited for viewports
- For single use only

Dimensions



Technical Data	Copper gasket, silver-plated, vacuum-annealed, DN 63 CF
Temperature range min.	-196 °C
Temperature range max.	450 °C
Materials in contact with media	OFHC Copper (Oxygen Free), silver-plated, vacuum-annealed
Package	5 Pieces
Temperature range	196 – 450 °C
Connection flange	DN 63 CF
Pressure range	$1 \cdot 10^{-13}$ hPa – to ambient pressure
Temperature range max.	450 °C 842 °F 723.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Copper gasket, silver-plated, vacuum-annealed, DN 63 CF
Copper gasket, silver-plated, vacuum-annealed, DN 63 CF	490DFL063-S-G-S5

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 2/21/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 