



**DuoVane 22, 1-phase
motor, 100–115 V / 200–
230 V, 50 Hz | 100–115 V
/ 200–230 V, 60 Hz,
Bimetal**



PFEIFFER ➤

DuoVane 22

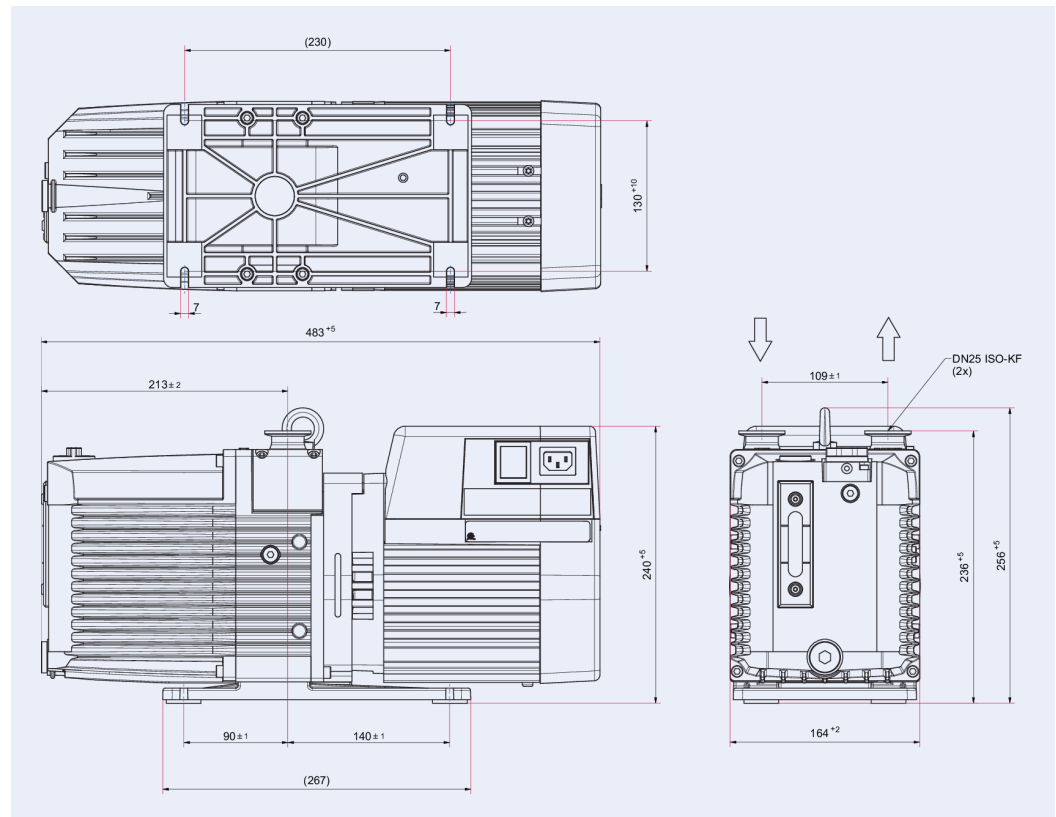


Illustration only

DuoVane 22, 1-phase motor, 100–115 V / 200–230 V, 50 Hz | 100–115 V / 200–230 V, 60 Hz, Bimetal

- Dual-stage, high-performance rotary vane pump with a pumping speed up to 22 m³/h
- With 1-phase motor
- With temperature sensor (Bimetal) for optimum motor protection
- Integrated gas ballast and HV safety valve
- For all low and medium vacuum applications
- Special feature: Various motor voltages for worldwide employment

Dimensions



DuoVane 22

Technical Data	DuoVane 22, 1-phase motor, 100–115 V / 200–230 V, 50 Hz 100–115 V / 200–230 V, 60 Hz, Bimetal
Gas ballast	Yes
Operating fluid	P3
Cooling method	Air (Forced convection)
Motor type	1-phase motor
Vacuum range min	$1 \cdot 10^{-2}$ hPa
Vacuum range max	$3 \cdot 10^{-3}$ hPa
Ambient temperature	12 – 40 °C
Temperature: Storage, max	55 °C
Temperature: Storage, min	-25 °C
Certification	CE
Input voltage(s)	100 – 115 / 200 – 230 V AC, 50 Hz 100 – 115 / 200 – 230 V AC ($\pm 10\%$), 60 Hz
Ultimate pressure with gas ballast	$1 \cdot 10^{-2}$ hPa $7.5 \cdot 10^{-3}$ Torr $1 \cdot 10^{-2}$ mbar
Leakage rate safety valve	$1 \cdot 10^{-5}$ Pa m ³ /s $7.5 \cdot 10^{-5}$ Torr l/s $1 \cdot 10^{-4}$ mbar l/s
Continuous gas input temperature, max.	40 °C 104 °F 313.2 K
Exhaust pressure, max.	1,500 hPa 1,125 Torr 1,500 mbar
Operating altitude, max.	2,000 m
Continuous inlet pressure, max.	50 hPa 37.5 Torr 50 mbar
Rotation speed at 60 Hz	1,800 rpm 1,800 min ⁻¹
Rotation speed at 50 Hz	1,500 rpm 1,500 min ⁻¹
Pumping speed at 60 Hz	22.5 m ³ /h 13.24 cfm 375.01 l/min
Pumping speed at 50 Hz	19.5 m ³ /h 11.4777 cfm 325.0065 l/min
Switch	Yes
Exhaust pressure, max.	1,500 hPa
Motor protection	Thermal winding protection
Mains cable	No, C14-plug inside the terminal box
Rated power 50 Hz	0.55 kW
Rated power 60 Hz	0.65 kW
Final pressure with gas ballast	$1 \cdot 10^{-2}$ hPa
Dimensions (L x W x H)	483 x 166 x 239 mm
Continuous inlet pressure, max.	50 hPa
Number of pumping stages	Two stage
Rotation speed at 60 Hz	1,800 rpm
Rotation speed at 50 Hz	1,500 rpm

DuoVane 22

Exhaust pressure, min.	Atmospheric pressure
Weight	32 kg
Pumping speed at 60 Hz	22.5 m³/h
Pumping speed at 50 Hz	19.5 m³/h
Connection flange (in)	DN 25 ISO-KF
Connection flange (out)	DN 25 ISO-KF

Order number	DuoVane 22, 1-phase motor, 100–115 V / 200–230 V, 50 Hz 100–115 V / 200–230 V, 60 Hz, Bimetal
DuoVane 22, 1-phase motor, 100–115 V / 200–230 V, 50 Hz 100–115 V / 200–230 V, 60 Hz, Bimetal	PK D940 020 C0

Accessories	DuoVane 22, 1-phase motor, 100–115 V / 200–230 V, 50 Hz 100–115 V / 200–230 V, 60 Hz, Bimetal
Seal kit for DuoVane 20	PK E30 200 -T
Maintenance kit 1 for DuoVane 5 - 20	PK E31 200 -T
Maintenance kit 2 for DuoVane 20	PK E31 210 -T
Service Kit 3 for DuoVane 22	PK E32 200 -T
Maintenance kit 3 for DuoVane 20	PK E34 200 -T
Diaphragm HV valve for DuoVane 5 - 20	PK E34 210 -T
Rotary shaft seal for DuoVane 5 - 20	PK E36 200 -T
Vane DuoVane 22	PK E38 200 -T
P3 operating fluids for DuoVane 6 – 22	PK E39 200 -T
Gas ballast valve for DuoVane 5 - 20	PK E39 205 -T
Sight glass for DuoVane 5 - 20	PK E39 206 -T



Errors and/or changes excepted. - 9/30/2025

Are you looking for an optimum vacuum solution?

**Talk to us:
Pfeiffer Vacuum GmbH
Germany
T +49 6441 802-0**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

**Follow Us On Social Media
#pfeiffervacuum**



PFEIFFER 

www.pfeiffer-vacuum.com