



**DuoVane 6, 3-phase
motor, 200-
220/240/380-415 V,
50 Hz | 200-
220/280/380-480 V,
60 Hz, 60 Hz, Bimetal**



PFEIFFER ➤

DuoVane 6

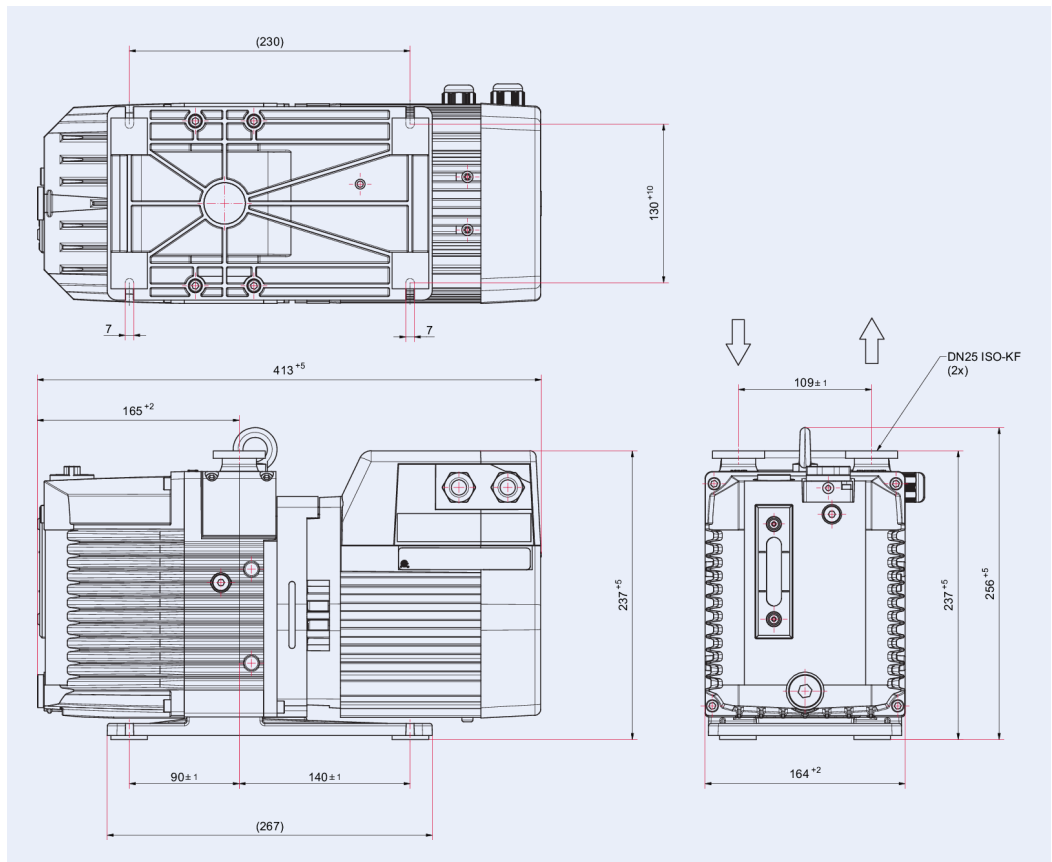


Illustration only

DuoVane 6, 3-phase motor, 200–220/240/380–415 V, 50 Hz | 200–220/280/380–480 V, 60 Hz, 60 Hz, Bimetal

- Dual-stage, high-performance rotary vane pump with a pumping speed up to 7 m³/h
- With 3-phase motor
- With temperature sensor (Bimetal) for optimum motor protection
- Integrated gas ballast and HV safety valve
- For all low and medium vacuum applications
- Special feature: Various motor voltages for worldwide employment

Dimensions



DuoVane 6

Technical Data	DuoVane 6, 3-phase motor, 200–220/240/380–415 V, 50 Hz 200–220/280/380–480 V, 60 Hz, 60 Hz, Bimetal
Gas ballast	Yes
Operating fluid	P3
Cooling method	Air (Forced convection)
Motor type	3-phase motor
Vacuum range min	$1 \cdot 10^{-2}$ hPa
Vacuum range max	$3 \cdot 10^{-3}$ hPa
Ambient temperature	12 – 40 °C
Temperature: Storage, max	55 °C
Temperature: Storage, min	-25 °C
Certification	CE
Input voltage(s)	200 – 220 / 240 / 380 – 415 V AC, 50 Hz 200 – 220 / 280 / 380 – 480 V AC (± 5 %), 60 Hz
Ultimate pressure with gas ballast	$1 \cdot 10^{-2}$ hPa $7.5 \cdot 10^{-3}$ Torr $1 \cdot 10^{-2}$ mbar
Leakage rate safety valve	$1 \cdot 10^{-5}$ Pa m ³ /s $7.5 \cdot 10^{-5}$ Torr l/s $1 \cdot 10^{-4}$ mbar l/s
Continuous gas input temperature, max.	40 °C 104 °F 313.2 K
Exhaust pressure, max.	1,500 hPa 1,125 Torr 1,500 mbar
Operating altitude, max.	2,000 m
Continuous inlet pressure, max.	50 hPa 37.5 Torr 50 mbar
Rotation speed at 60 Hz	1,800 rpm 1,800 min ⁻¹
Rotation speed at 50 Hz	1,500 rpm 1,500 min ⁻¹
Pumping speed at 60 Hz	6.5 m ³ /h 3.83 cfm 108.34 l/min
Pumping speed at 50 Hz	5.5 m ³ /h 3.2373 cfm 91.6685 l/min
Switch	No
Exhaust pressure, max.	1,500 hPa
Motor protection	Bimetal
Mains cable	No
Rated power 50 Hz	0.55 kW
Rated power 60 Hz	0.66 kW
Final pressure with gas ballast	$1 \cdot 10^{-2}$ hPa
Dimensions (L x W x H)	418 x 166 x 239 mm
Continuous inlet pressure, max.	50 hPa
Number of pumping stages	Two stage
Rotation speed at 60 Hz	1,800 rpm
Rotation speed at 50 Hz	1,500 rpm

DuoVane 6

Operating fluid amount	1.1 l
Exhaust pressure, min.	Atmospheric pressure
Weight	25 kg
Pumping speed at 60 Hz	6.5 m³/h
Pumping speed at 50 Hz	5.5 m³/h
Connection flange (in)	DN 25 ISO-KF
Connection flange (out)	DN 25 ISO-KF

Order number	DuoVane 6, 3-phase motor, 200-220/240/380-415 V, 50 Hz 200-220/280/380-480 V, 60 Hz, 60 Hz, Bimetal
DuoVane 6, 3-phase motor, 200-220/240/380-415 V, 50 Hz 200-220/280/380-480 V, 60 Hz, 60 Hz, Bimetal	PK D910 020 14

Accessories	DuoVane 6, 3-phase motor, 200-220/240/380-415 V, 50 Hz 200-220/280/380-480 V, 60 Hz, 60 Hz, Bimetal
Seal kit for DuoVane 5	PK E30 203 -T
Maintenance kit 1 for DuoVane 5 - 20	PK E31 200 -T
Maintenance kit 2 for DuoVane 5	PK E31 213 -T
Maintenance kit 3 for DuoVane 5	PK E32 203 -T
Valves and springs for DuoVane 5	PK E34 203 -T
Diaphragm HV valve for DuoVane 5 - 20	PK E34 210 -T
Rotary shaft seal for DuoVane 5 - 20	PK E36 200 -T
Gate valve DuoVane 5	PK E38 203 -T
P3 operating fluids for DuoVane 6 - 22	PK E39 200 -T
Gas ballast valve for DuoVane 5 - 20	PK E39 205 -T
Sight glass for DuoVane 5 - 20	PK E39 206 -T



Errors and/or changes excepted. - 9/30/2025

Are you looking for an optimum vacuum solution?

**Talk to us:
Pfeiffer Vacuum GmbH
Germany
T +49 6441 802-0**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

**Follow Us On Social Media
#pfeiffervacuum**



PFEIFFER 

www.pfeiffer-vacuum.com