

HiPace® 60 P with TC 110 RS, DN 63 ISO-K

PFEIFFER ➤

HiPace® 60 P

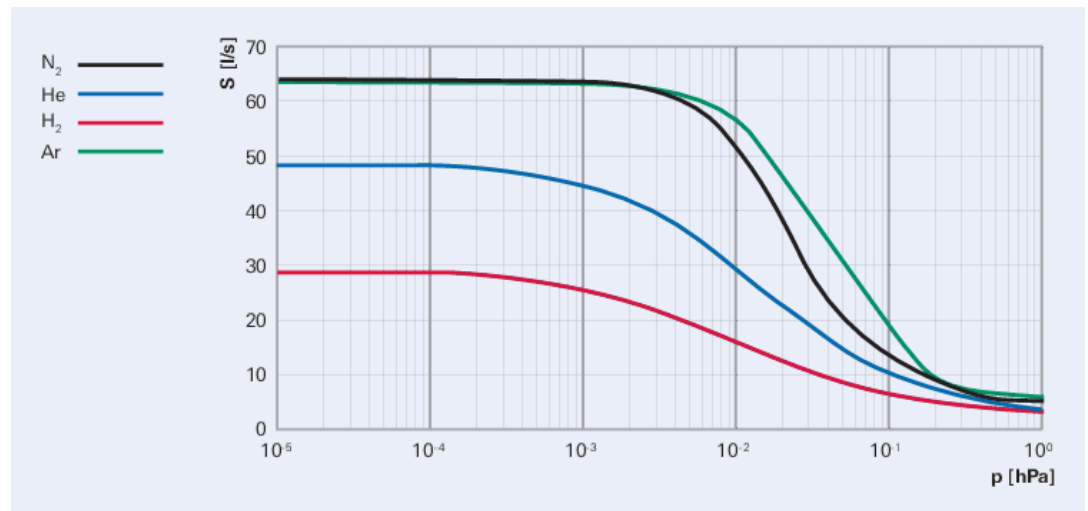


Illustration only

HiPace® 60 P with TC 110 RS, DN 63 ISO-K


- Small yet powerful turbo molecular pump without Holweck-stage with a pumping speed of up to 64 l/s for N₂
- Integrated drive electronics TC 110 RS
- 4 accessory ports and RS-485 directly on the TC 110 RS
- For installation in any orientation
- Ideal for dependable systems integration
- Insensitive to dust
- Extensive accessories expand the range of applications

Characteristics



HiPace® 60 P

Dimensions

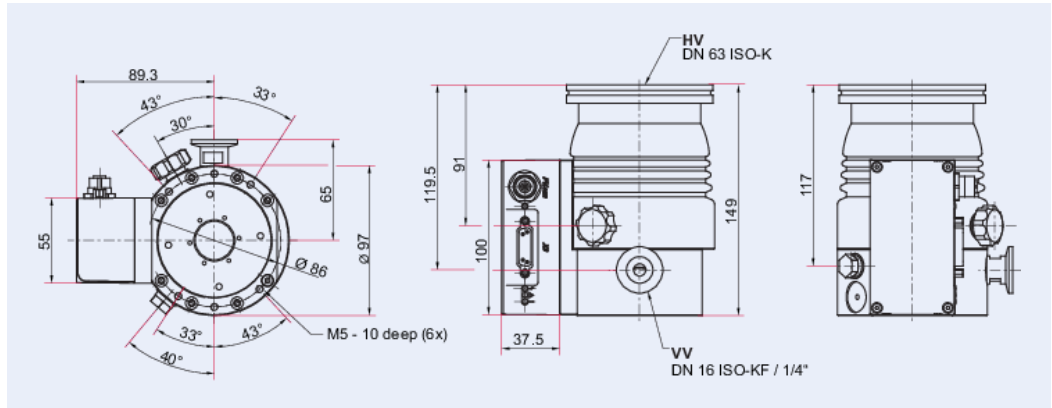

HiPace® 60 P

Technical Data	HiPace® 60 P with TC 110 RS, DN 63 ISO-K
Connection flange (out)	DN 16 ISO-KF G ¼"
Connection flange (in)	DN 63 ISO-F
Electronic drive unit	TC 110 RS
Type of electronic drive unit installation	Integrated electronic drive unit
Rotation speed $\pm 2\%$	90,000 rpm
Rotation speed variable	50 – 100 %
I/O interfaces	RS-485, Remote
Mounting orientation	Arbitrary
Input voltage(s)	24 V DC ($\pm 10\%$)
Final pressure without gas ballast	$1 \cdot 10^{-6}$ hPa
Gas throughput at full rotational speed for Ar	0.83 hPa·l/s
Gas throughput at full rotational speed for H ₂	55 hPa·l/s
Gas throughput at full rotational speed for He	55 hPa·l/s
Gas throughput at full rotational speed for N ₂	9.2 hPa·l/s
Weight	2.3 kg
Run-up time	1 min
Integral leakage rate	$< 2 \cdot 10^{-8}$ Pa m ³ /s
Compression ratio for Ar	$2 \cdot 10^6$
Compression ratio for H ₂	$2 \cdot 10^2$
Compression ratio for He	$3.5 \cdot 10^2$
Compression ratio for N ₂	$1 \cdot 10^6$
Cooling method	Natural convection
Bearing	Hybrid
Power consumption max.	110 W
Position of power supply pack	External power supply pack
Pumping speed for Ar	63 l/s
Pumping speed for H ₂	28 l/s
Pumping speed for He	48 l/s
Pumping speed for N ₂	64 l/s
Sound pressure level	≤ 48 dB(A)
Protection degree	IP44 Type 12
Current max.	4.6 A
Fore-vacuum max. for N ₂	4 hPa
Permissible radial magnetic field max.	4 mT
Emission sound pressure level (EN ISO 2151) level 1	≤ 48 dB(A)

HiPace® 60 P

Final pressure according to PNEUROP

$<1 \cdot 10^{-6}$ hPa | $<7.5 \cdot 10^{-7}$ Torr | $<1 \cdot 10^{-6}$ mbar

Order number

HiPace® 60 P with TC 110 RS, DN 63 ISO-K

HiPace® 60 P with TC 110 RS, DN 63 ISO-K

PM P04 693 A

Accessories

HiPace® 60 P with TC 110 RS, DN 63 ISO-K

Operating fluid reservoir, cpl. for HiPace 80

PM 143 740 -T

Spare parts package 1, bearing for HiPace 80
(from index A)

PM E01 056 -T



Errors and/or changes excepted. - 9/30/2025

Are you looking for an optimum vacuum solution?

**Talk to us:
Pfeiffer Vacuum GmbH
Germany
T +49 6441 802-0**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

**Follow Us On Social Media
#pfeiffervacuum**



PFEIFFER 

www.pfeiffer-vacuum.com