




HiPace® 80 Neo with TC 80, DN 40 ISO-KF

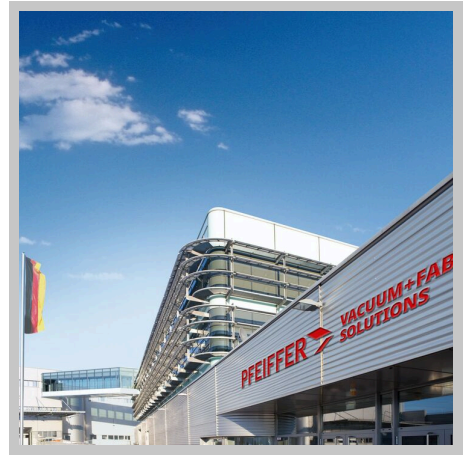

PFEIFFER ➤

HiPace® 80 Neo

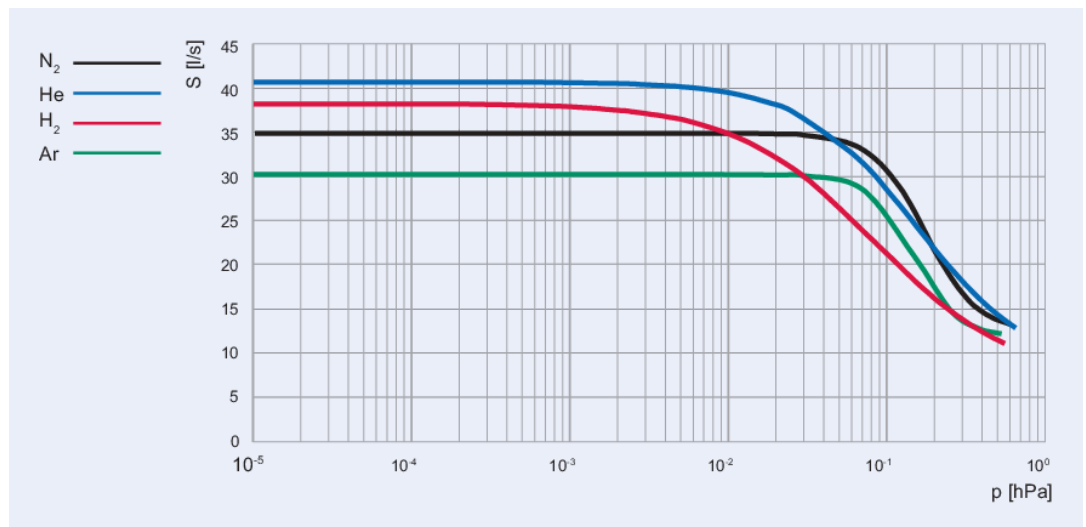


Illustration only

HiPace® 80 Neo with TC 80, DN 40 ISO-KF

- Small yet powerful turbopump with a pumping speed of up to 35 l/s for N₂
- TC 80 integrated electronic drive unit
- For installation in any orientation
- Ideal for dependable systems integration
- Extensive accessories expand the range of applications

Characteristics



[illegible]

HiPace® 80 Neo

Technical Data	HiPace® 80 Neo with TC 80, DN 40 ISO-KF
Connection flange (out)	DN 16 ISO-KF
Connection flange (in)	DN 40 ISO-KF
Electronic drive unit	TC 80
Type of electronic drive unit installation	Integrated electronic drive unit
Rotation speed $\pm 2\%$	90,000 rpm
Rotation speed variable	50 – 100 %
I/O interfaces	RS-485, Remote
Mounting orientation	Arbitrary
Input voltage(s)	24 V DC ($\pm 10\%$)
Gas throughput at full rotational speed for Ar	0.54 hPa·l/s
Gas throughput at full rotational speed for H ₂	15.3 hPa·l/s
Gas throughput at full rotational speed for He	2.7 hPa·l/s
Gas throughput at full rotational speed for N ₂	1.3 hPa·l/s
Weight	1.7 kg
Run-up time	75 s
Integral leakage rate	$1 \cdot 10^{-8}$ Pa m ³ /s
Compression ratio for Ar	$1 \cdot 10^{11}$
Compression ratio for H ₂	$1.4 \cdot 10^5$
Compression ratio for He	$1.3 \cdot 10^7$
Compression ratio for N ₂	$1 \cdot 10^{11}$
Cooling method	Natural convection
Bearing	Hybrid
Power consumption max.	110 W
Position of power supply pack	External power supply pack
Pumping speed for Ar	30 l/s
Pumping speed for H ₂	38 l/s
Pumping speed for He	41 l/s
Pumping speed for N ₂	35 l/s
Sound pressure level	48 dB(A)
Protection degree	IP54 Type 12
Current max.	5.6 A
Fore-vacuum max. for N ₂	22 hPa
Permissible radial magnetic field max.	3.7 mT
Emission sound pressure level (EN ISO 2151) level 1	48 dB(A)

HiPace® 80 Neo

Order number	HiPace® 80 Neo with TC 80, DN 40 ISO-KF
HiPace® 80 Neo with TC 80, DN 40 ISO-KF	PM P080 261 10



Errors and/or changes excepted. - 9/30/2025

Are you looking for an optimum vacuum solution?

**Talk to us:
Pfeiffer Vacuum GmbH
Germany
T +49 6441 802-0**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

**Follow Us On Social Media
#pfeiffervacuum**



PFEIFFER 

www.pfeiffer-vacuum.com