



HiScroll 46 with pressure sensor



PFEIFFER 

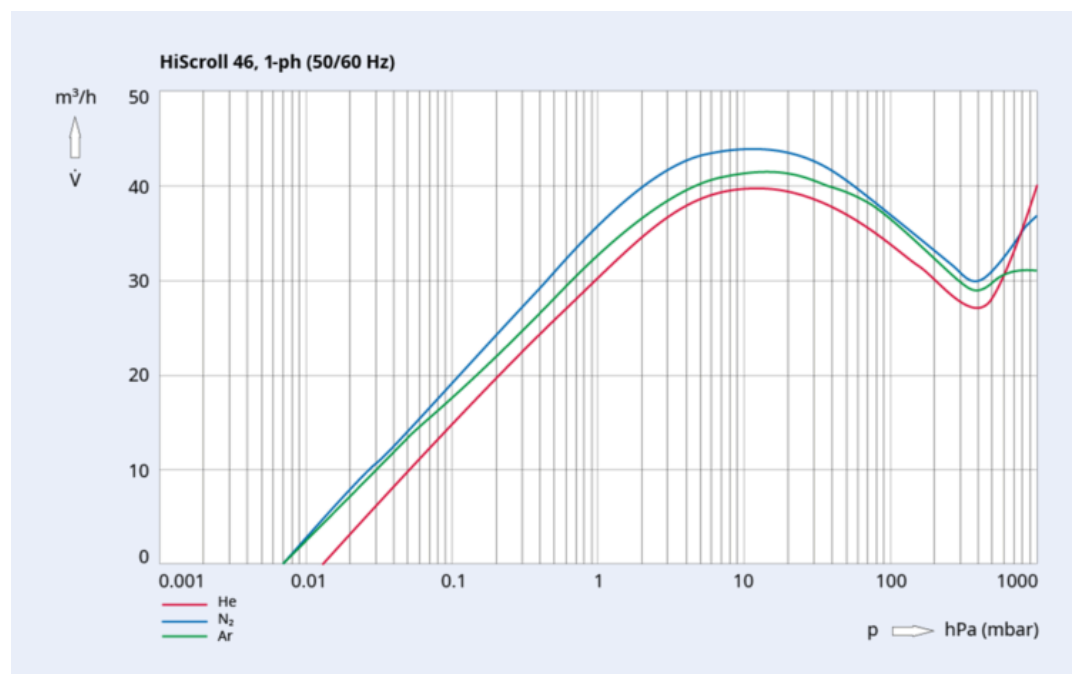


Illustration only


HiScroll 46 with pressure sensor

- No hydrocarbons: Completely dry & oil-free Scroll vacuum pump
- Ultra-quiet and low-vibration - perfect for laboratories and quiet working environments
- Safe operation due to the installed non-return valve and hermetically sealed pumping system
- Seamless integration - compact design, easy to implement and flexible to use
- Maximum efficiency and performance - shortest pump-down time with lowest energy consumption
- Sustainable: Lowest power consumption at final pressure, lower heat generation and lower cooling requirements
- Industry 4.0 compatible: Operation with other intelligent products such as turbopumps via RS-485, optional: ProfiNet/EtherCAT
- Simple logistics: Our HiScroll pumps are suitable for all voltages worldwide
- Low operating costs thanks to the highest quality, short maintenance times and long maintenance intervals

Characteristics



Dimensions

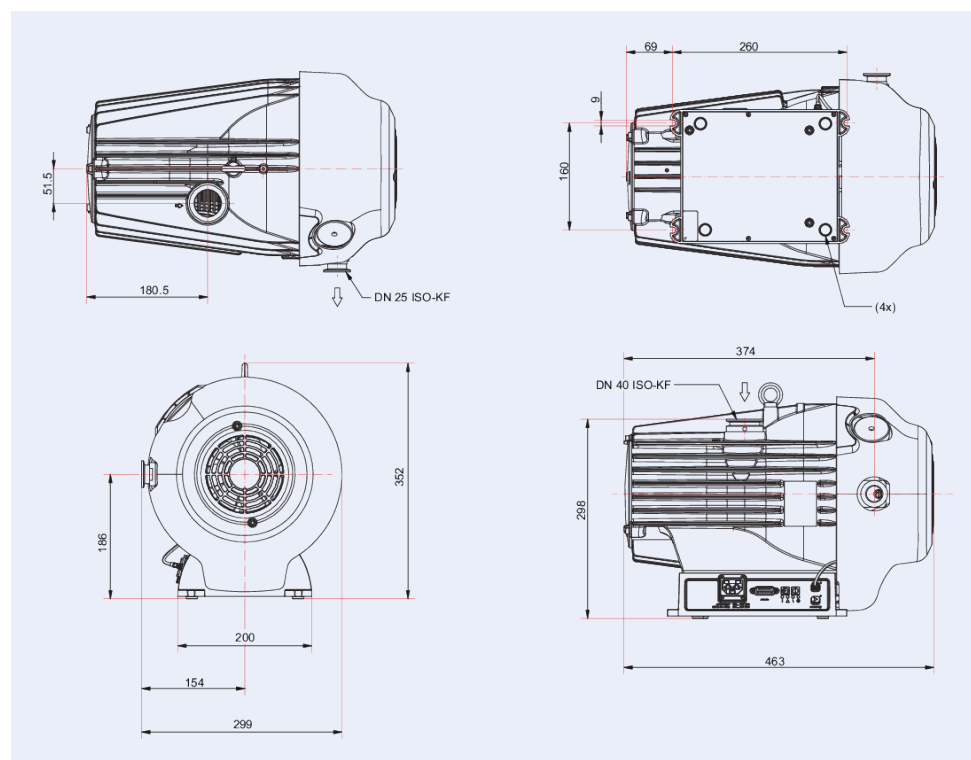

Technical Data	HiScroll 46 with pressure sensor
Gas ballast	Yes
Cooling method	Air (Forced convection)
Motor type	1-phase motor
Motor protection	Internal
I/O interfaces	RS485
Ambient temperature	5 – 40 °C
Certification	Semi S2 compatible Semi S8 compatible cTUVus certified according to UL / CSA 61010-1
Weight	32 kg 70.55 lb
Pumping speed	43 m ³ /h
Input voltage(s)	100 – 127 / 200 – 240 V AC (±10 %), 50/60 Hz
Emission sound pressure level (EN ISO 2151)	≤47 dB(A)
Gas ballast pressure	1,500 hPa 1,125 Torr 1,500 mbar
Ultimate pressure	$7 \cdot 10^{-3}$ hPa $5.25 \cdot 10^{-3}$ Torr $7 \cdot 10^{-3}$ mbar
Ultimate pressure for gas ballast stage 1	$3 \cdot 10^{-2}$ hPa $2.25 \cdot 10^{-2}$ Torr $3 \cdot 10^{-2}$ mbar
Ultimate pressure for gas ballast stage 2	$2 \cdot 10^{-1}$ hPa $1.5 \cdot 10^{-1}$ Torr $2 \cdot 10^{-1}$ mbar
Tested base pressure	$7 \cdot 10^{-3}$ hPa $5.25 \cdot 10^{-3}$ Torr $7 \cdot 10^{-3}$ mbar
Exhaust pressure, max.	1,200 hPa 900 Torr 1,200 mbar
Switch	Yes
Rotation speed	720 – 1800 rpm
Nominal rotation speed	1,800 rpm 1,800 min ⁻¹
Gas ballast flow stage 1	1.38 m ³ /h 0.812 cfm 23 l/min
Gas ballast flow stage 2	2.1 m ³ /h 1.236 cfm 35 l/min
Operating altitude, max.	3,000 m
Intake pressure max.	1,100 hPa 825 Torr 1,100 mbar
Mains cable	No
Dimensions (L x W x H)	463 x 299 x 334 mm
Connection flange (in)	DN 40 ISO-KF
Connection flange (out)	DN 25 ISO-KF

Order number	HiScroll 46 with pressure sensor
HiScroll 46 with pressure sensor	PD S40 010

Accessories	HiScroll 46 with pressure sensor
TipSeal maintenance kit for HiScroll 46	PD E40 000 -T
Valve set for HiScroll 46	PD E43 000 -T



Errors and/or changes excepted. - 4/2/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum GmbH

Germany

T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 