





KAS 40, condensate separator for pumping speeds up to 120 m<sup>3</sup>/h






## **PFEIFFER**



## KAS 40, condensate separator for pumping speeds up to 120 m<sup>3</sup>/h

- For inlet and outlet ports
- Protects the rotary vane pump against sucked in liquids and condensate return
- For operation with HenaLine please use ISO-KF adapter PK 300 525
- Customer benefit: Longer life time of operating fluid, no mixture with process liquid

## **Dimensions**

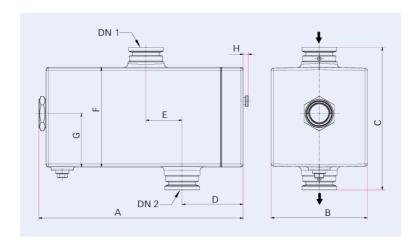

Α	340 mm	
В	160 mm	
С	237 mm	
D	102 mm	
DN 1	DN 40 ISO-KF	
DN 2	DN 40 ISO-KF	
Е	60 mm	
F	166 mm	
G	89 mm	
Н	9 mm	

Technical Data	KAS 40, condensate separator for pumping speeds up to 120 m <sup>3</sup> /h
Pumping speed category	35 – 65 m³/h
For pumping speed up to	120 m³/h
For pumping speed up to	120 m <sup>3</sup> /h   70.632 cfm   2,000.04 l/min
Pressure max. (absolute)	1,500 hPa   1,125 Torr   1,500 mbar
Weight	6.1 kg   13.45 lb
Capacity	31
Pressure max. (absolute)	1,500 hPa
Connection flange	DN 40 ISO-KF / DN 40 ISO-KF
Weight	6.1 kg
Connection flange (in)	DN 40 ISO-KF
Connection flange (out)	DN 40 ISO-KF

Order hilmher	KAS 40, condensate separator for pumping speeds up to 120 m <sup>3</sup> /h
KAS 40, condensate separator for pumping speeds up to 120 m <sup>3</sup> /h	PK Z10 008







Are you looking for an optimum vacuum solution?

Talk to us: Pfeiffer Vacuum GmbH Germany T +49 6441 802-0

Or scan the barcode, to visit our web page:



https://webportal.pfeiffer-vacuum.com/global/en/contact

Follow Us On Social Media #pfeiffervacuum











www.pfeiffer-vacuum.com

