




**Mounting kit for
DN 63 ISO-K to ISO-F,
with collar flange,
coated centering ring
with splinter shield,
stud screws**

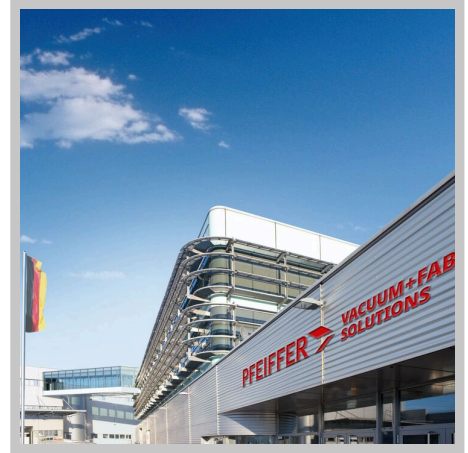

PFEIFFER 

Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with splinter shield



Illustration only

Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with splinter shield, stud screws

- For turbopump with HV-flange DN 63 ISO-K
- Suitable only for HiPace 30 to HiPace 80 and SplitFlow 50
- Collar flange DN 63 with retaining ring
- Centering ring with multi-functional coating for anti-twist protection
- Splinter shield: to safeguard against foreign objects, mesh width 0.8 mm, molecular conductance for N₂ 194 l/s
- 4 stud screws M8 x 30 coated and nuts with flange
- Note: Required for secure mounting of the turbopump

| Technical Data | Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with splinter shield, stud screws |
|--|--|
| Mesh | 0.8 mm |
| Molecular conductance for N ₂ | 194 l/s |
| Connection flange | DN 63 ISO-K |

| Order number | Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with splinter shield, stud screws |
|--|--|
| Mounting kit for DN 63 ISO-K to ISO-F, with collar flange, coated centering ring with splinter shield, stud screws | PM 016 936 -T |



Errors and/or changes excepted. - 2/20/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum GmbH

Germany

T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 