



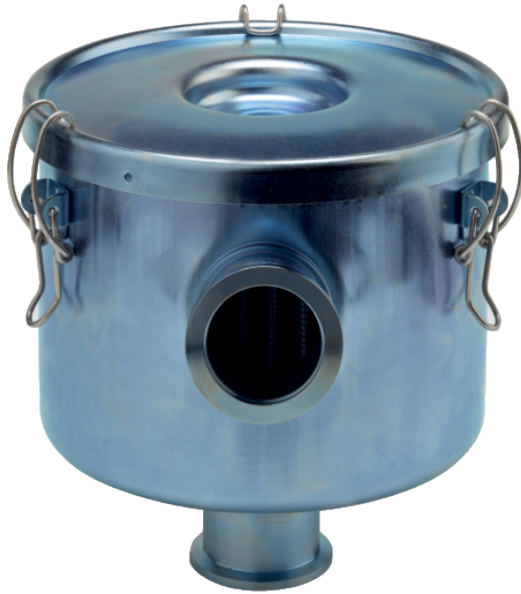

SAS 40, dust separator, DN 40 ISO-KF

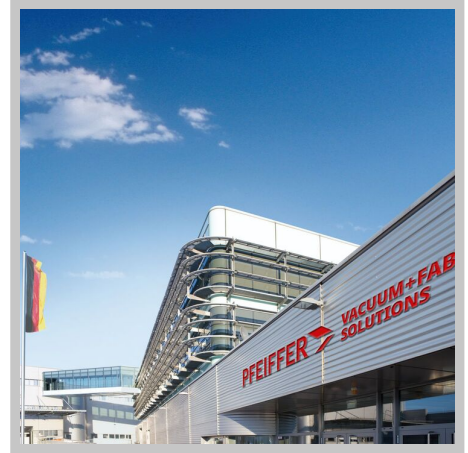

PFEIFFER 

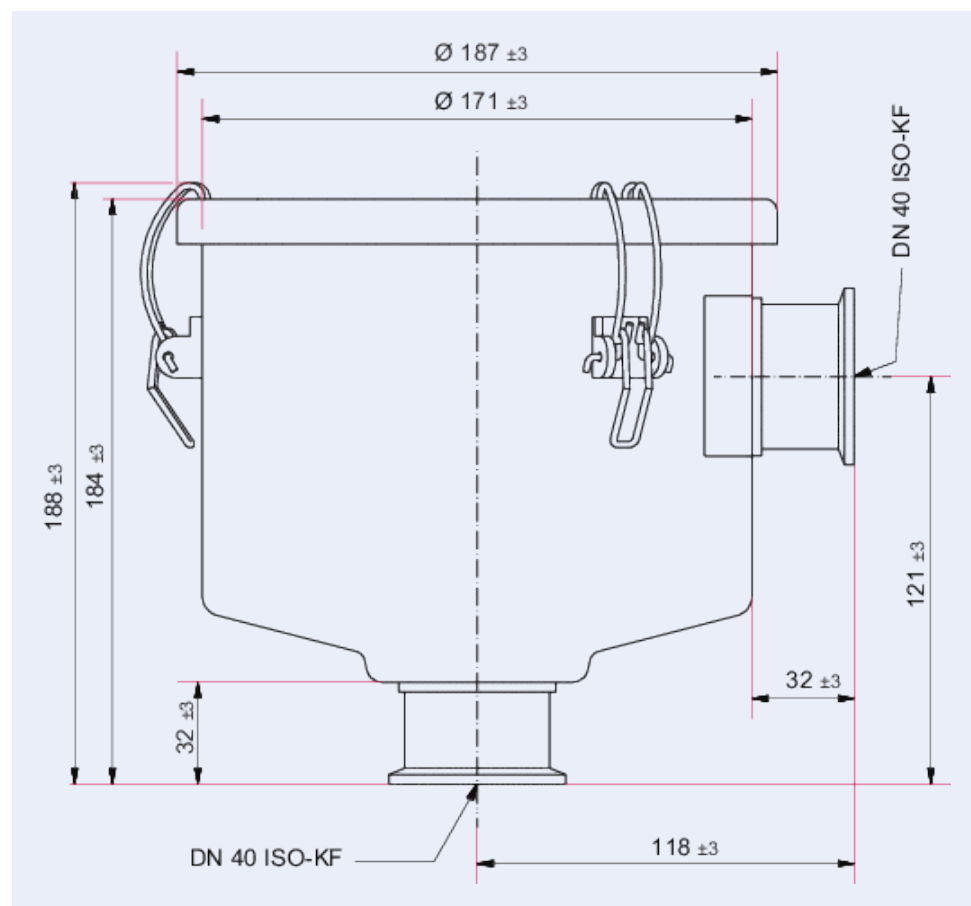


Illustration only

SAS 40, dust separator, DN 40 ISO-KF

- For the inlet flange
- Protects the pump against particles from the process
- Customer benefit: Longer service life of mechanical parts

Dimensions



Technical Data	SAS 40, dust separator, DN 40 ISO-KF
Temperature range (vacuum side) min.	-26 °C
Temperature range (vacuum side) max.	104 °C
For pumping speed up to	120 m ³ /h
Temperature range (vacuum side)	26 – 104 °C
Grain size limit (separable)	5 µm
For pumping speed up to	195 m ³ /h 114.777 cfm 3,250.065 l/min
Conductance at 1 hPa	180 l/s
Conductance at 100 hPa	680 l/s
Weight	2.1 kg 4.63 lb
Conductance at 1 hPa	380 l/s
Conductance at 100 hPa	2,250 l/s
Degree of separation	99.7 %
Connection flange	DN 40 ISO-KF / DN 40 ISO-KF
Inlet pressure max.	Atmospheric pressure
Weight	2.06 kg
Connection flange (in)	DN 40 ISO-KF
Connection flange (out)	DN 40 ISO-KF

Order number	SAS 40, dust separator, DN 40 ISO-KF
SAS 40, dust separator, DN 40 ISO-KF	PK Z60 510



Errors and/or changes excepted. - 2/21/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum GmbH

Germany

T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 