



**PFEIFFER** 

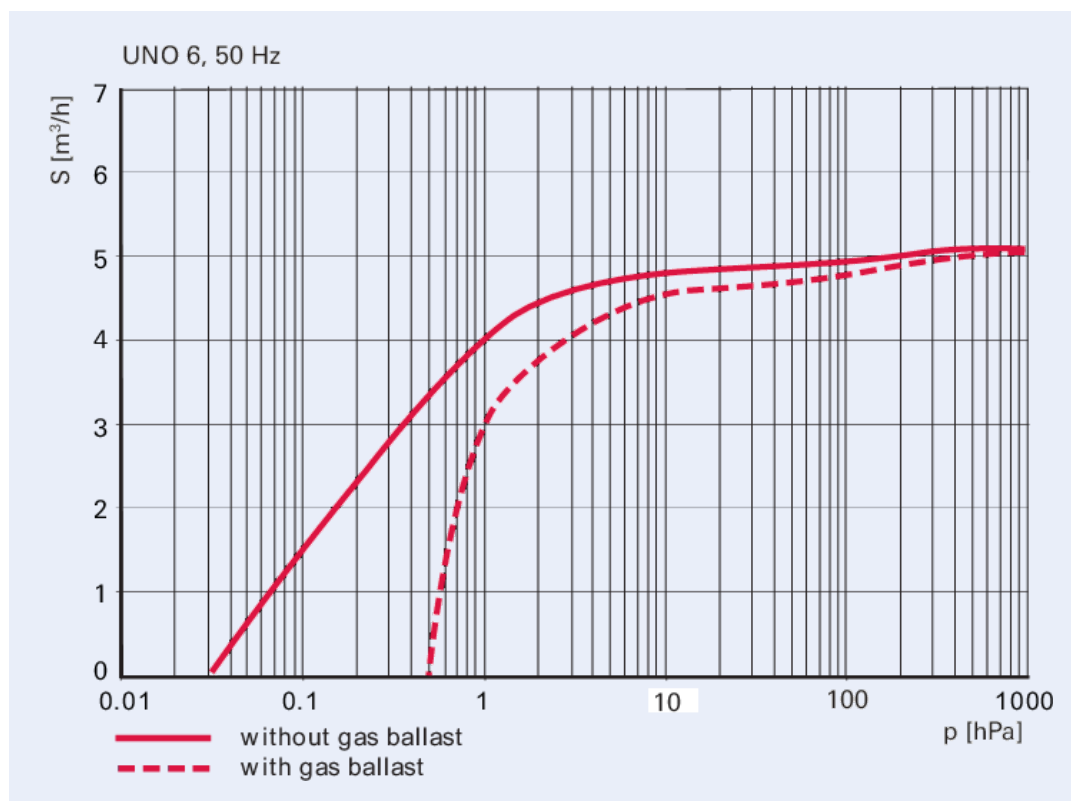


Illustration only


## Uno 6, 1-phase motor, 115 V, 50/60 Hz, DN 16

- Single-stage, high-performance rotary vane pump with a pumping speed of 4.8 m<sup>3</sup>/h at 50 Hz / 5.8 m<sup>3</sup>/h at 60 Hz
- With 1-phase motor IE 2, with C14 plug inside terminal box
- Integrated gas ballast and safety valve
- OME oil return device is included with the pump
- For all low and medium vacuum applications
- Other motor voltages available on request
- The most compact pumps in this pumping speed class

## Characteristics



## Dimensions

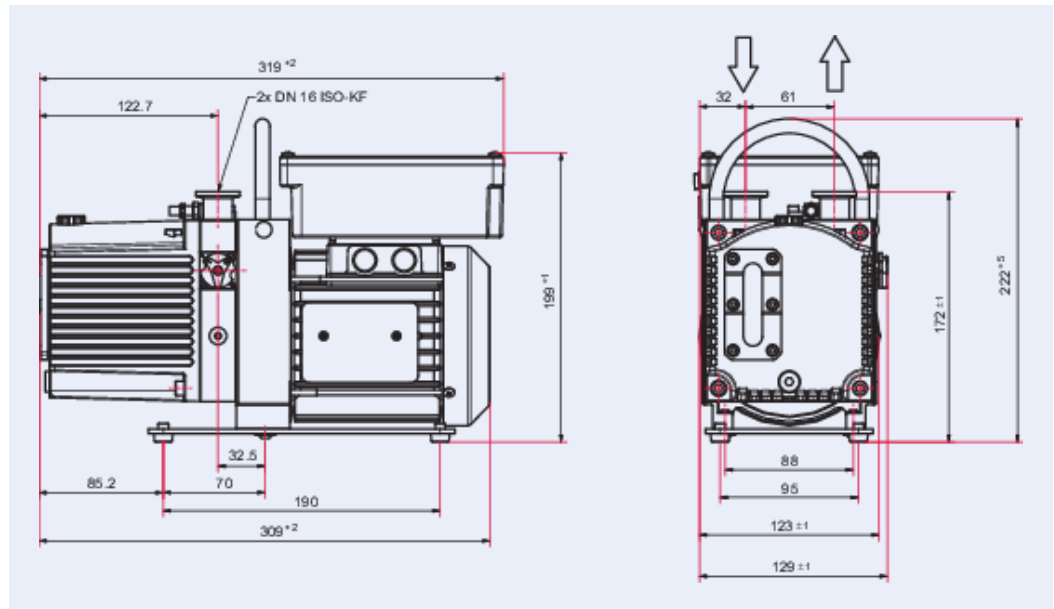

# Uno 6

Technical Data	Uno 6, 1-phase motor, 115 V, 50/60 Hz, DN 16
Gas ballast	Yes
Operating fluid	P3
Cooling method	Air (Forced convection)
Motor type	1-phase motor
Vacuum range min	$5 \cdot 10^{-1}$ hPa
Vacuum range max	$3 \cdot 10^{-2}$ hPa
Recommended on-site electric fuse protection	6 A
Ambient temperature	12 – 40 °C
Temperature: Storage, max	55 °C
Temperature: Storage, min	-25 °C
Certification	CE   cTUVus certified according to UL / CSA 61010-1
Input voltage(s)	115 V AC ( $\pm 10$ %), 50/60 Hz
Ultimate pressure with gas ballast	$5 \cdot 10^{-1}$ hPa   $3.75 \cdot 10^{-1}$ Torr   $5 \cdot 10^{-1}$ mbar
Leakage rate safety valve	$1 \cdot 10^{-5}$ Pa m <sup>3</sup> /s   $7.5 \cdot 10^{-5}$ Torr l/s   $1 \cdot 10^{-4}$ mbar l/s
Continuous gas input temperature, max.	40 °C   104 °F   313.2 K
Exhaust pressure, max.	1,500 hPa   1,125 Torr   1,500 mbar
Rotation speed at 60 Hz	3,600 rpm   3,600 min <sup>-1</sup>
Rotation speed at 50 Hz	3,000 rpm   3,000 min <sup>-1</sup>
Pumping speed at 60 Hz	5.8 m <sup>3</sup> /h   3.41 cfm   96.67 l/min
Pumping speed at 50 Hz	4.8 m <sup>3</sup> /h   2.82528 cfm   80.0016 l/min
Switch	Yes
Exhaust pressure, max.	1,500 hPa
Motor protection	Bimetal
Mains cable	No, C14-plug inside the terminal box
Rated power 50 Hz	0.15 kW
Rated power 60 Hz	0.18 kW
Final pressure with gas ballast	$5 \cdot 10^{-1}$ hPa
Dimensions (L x W x H)	319 x 130 x 199 mm
Number of pumping stages	Single stage
Rotation speed at 60 Hz	3,600 rpm
Rotation speed at 50 Hz	3,000 rpm
Operating fluid amount	0.4 l
Exhaust pressure, min.	Atmospheric pressure
Weight	10.5 kg
Pumping speed at 60 Hz	5.8 m <sup>3</sup> /h

# Uno 6

Pumping speed at 50 Hz	4.8 m <sup>3</sup> /h
Connection flange (in)	DN 16 ISO-KF
Connection flange (out)	DN 16 ISO-KF

<b>Order number</b>	<b>Uno 6, 1-phase motor, 115 V, 50/60 Hz, DN 16</b>
Uno 6, 1-phase motor, 115 V, 50/60 Hz, DN 16	PK D070 010 B0 A



Errors and/or changes excepted. - 9/30/2025

**Are you looking for an optimum vacuum solution?**

**Talk to us:  
Pfeiffer Vacuum GmbH  
Germany  
T +49 6441 802-0**

**Or scan the barcode, to visit our web page:**



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

**Follow Us On Social Media  
#pfeiffervacuum**



**PFEIFFER** 

[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)