




**Venting valve, 24 V DC,
G 1/8" without cable**

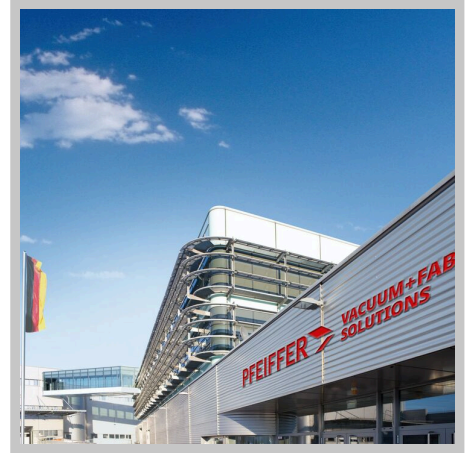

PFEIFFER

Venting valve




Venting valve, 24 V DC, G 1/8" without cable

- G 1/8" connection
- Valve is normally closed
- For free assemblies

Illustration only

Dimensions

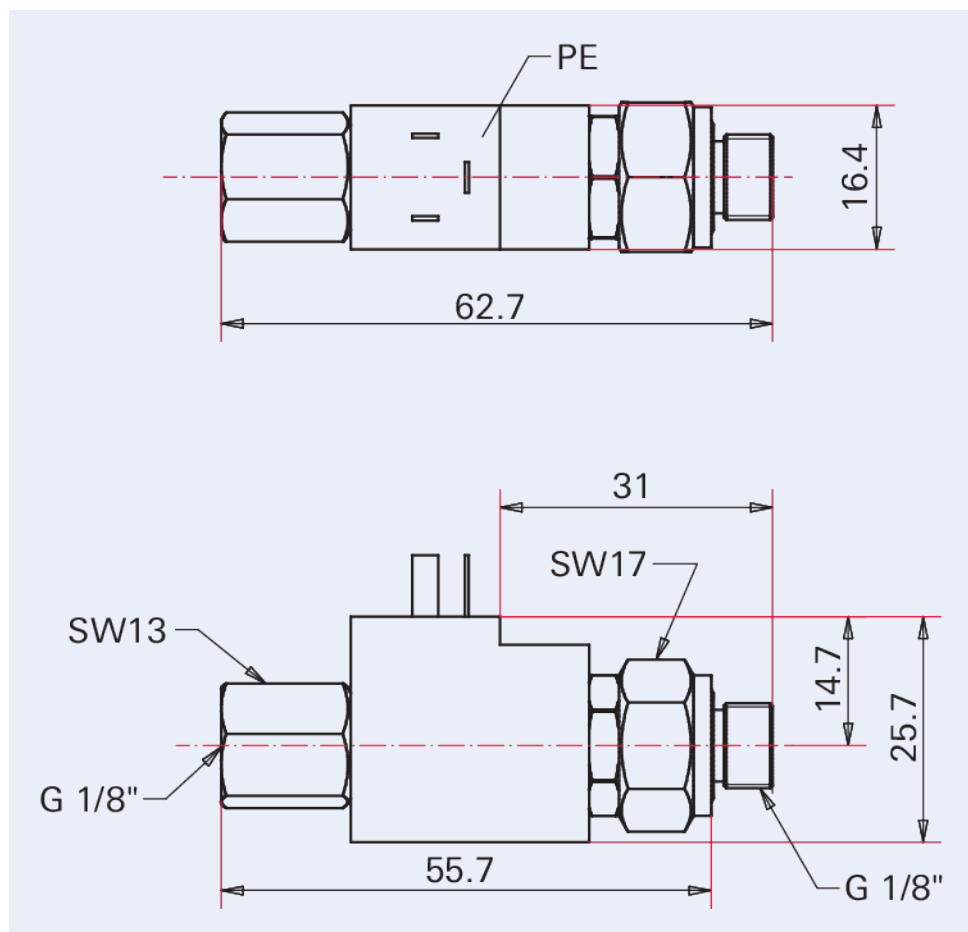

Technical Data	Venting valve, 24 V DC, G 1/8" without cable
Type of electronic drive unit installation	Customized configuration
Control voltage	24 V DC
Thread	G 1/8"
Weight	67 g
Gas flow at atmospheric pressure	130 hPa·l/s
Electrical connection	C-Industry (Micro)
Inlet pressure max.	1500 hPa (absolute)
Weight	67 g
Connection flange (in)	G 1/8"
Connection flange (out)	G 1/8"

Order number	Venting valve, 24 V DC, G 1/8" without cable
Venting valve, 24 V DC, G 1/8" without cable	PM Z01 293



Errors and/or changes excepted. - 2/21/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum GmbH

Germany

T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 