

Vibration damper for HiPace 60/80, DN 63 ISO-K









Vibration damper

PFEIFFER

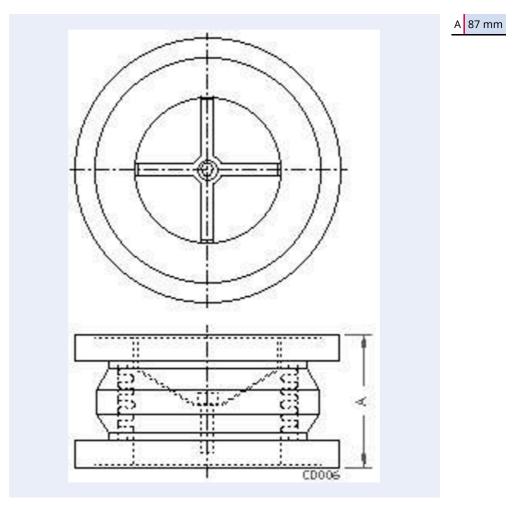


Illustration only

Vibration damper for HiPace 60/80, DN 63 ISO-K

- Connection for DN 63 ISO-K with bracket screws
- Connection for DN 63 ISO-F with retaining ring
- Suitable for HiPace 60/80 and SplitFlow 50
- For the employment of turbopumps on systems and plants that are sensitive to vibration
- The flow resistance should be taken into account at the design of the pumping system
- Only vertical operation allowed
- Note: Fastening of the pump see operating instructions
- An additional pump mounting is required

Dimensions



| Technical Data | Vibration damper for HiPace 60/80, DN 63 ISO-K |
|-------------------|---|
| Connection flange | DN 63 ISO-K |

| Order number | Vibration damper for HiPace 60/80, DN 63 ISO-K |
|---|---|
| Vibration damper for HiPace 60/80, DN 63 ISO-K | PM 006 800 -X |







Are you looking for an optimum vacuum solution? Talk to us: Pfeiffer Vacuum GmbH Germany T +49 6441 802-0 Or scan the barcode, to visit our web page:



https://webportal.pfeiffer-vacuum.com/global/en/contact

Follow Us On Social Media #pfeiffervacuum



www.pfeiffer-vacuum.com

