




HiScroll 6, scroll pump, with automated gas ballast

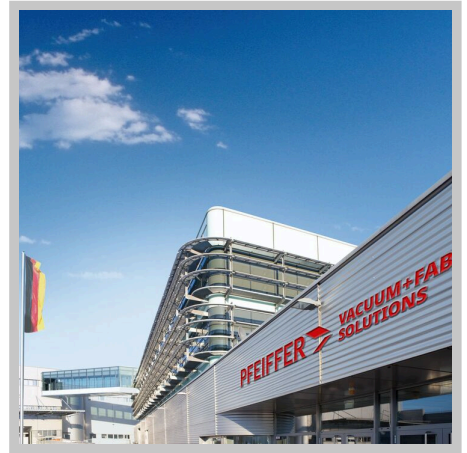

PFEIFFER ➤

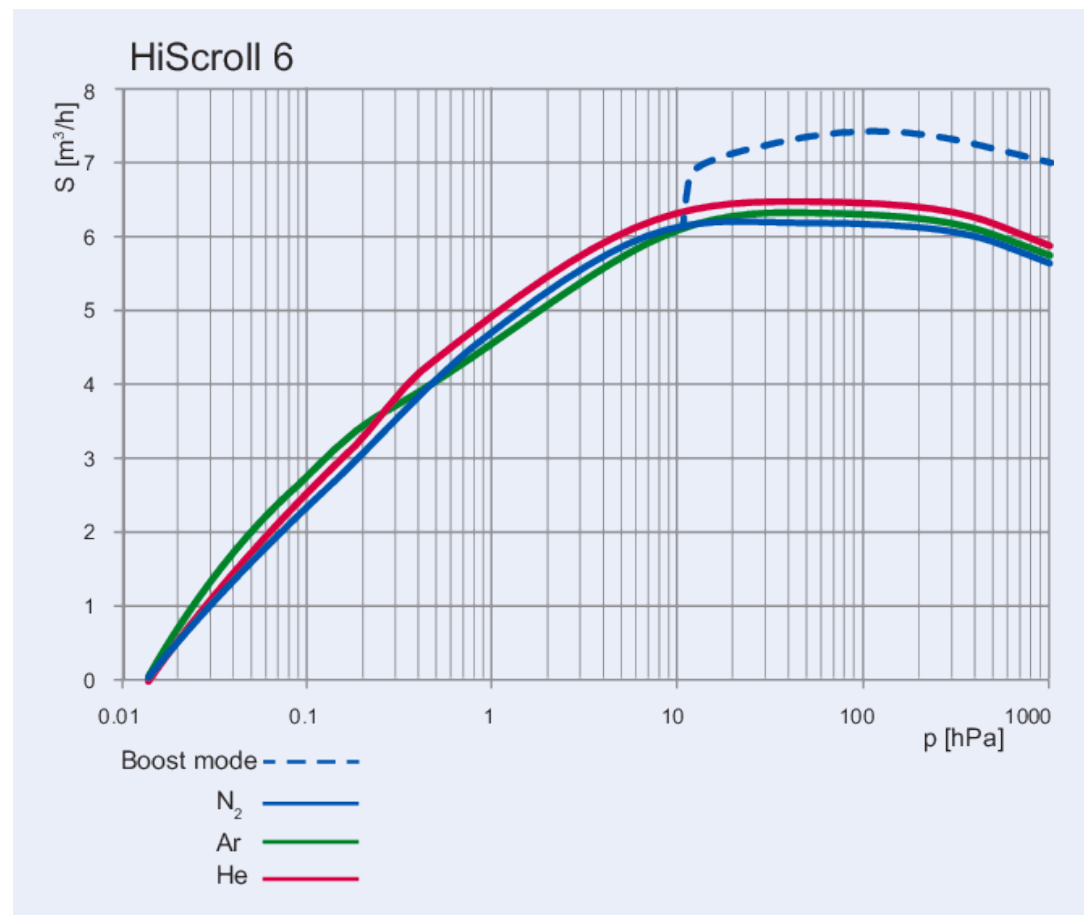


Illustration only


HiScroll 6, scroll pump, with automated gas ballast

- No hydrocarbons: Completely dry & oil-free Scroll vacuum pump
- Low noise level, minimal vibrations and compact design, ideal also for use in laboratories
- Safe operation due to the installed non-return valve and hermetically sealed pumping system
- Low operating costs thanks to the highest quality, short maintenance times and long maintenance intervals
- Power as required: Stable pumping speed and short cycle times
- Sustainable: 15 % higher efficiency of the drive system, lower heat generation and lower cooling requirements
- Industry 4.0 compatible: Operation with other intelligent products, such as turbopumps via RS-485
- Simple logistics: Our HiScroll pumps are suitable for all voltages worldwide
- Automated gas ballast for fully integrated systems

Characteristics



Dimensions

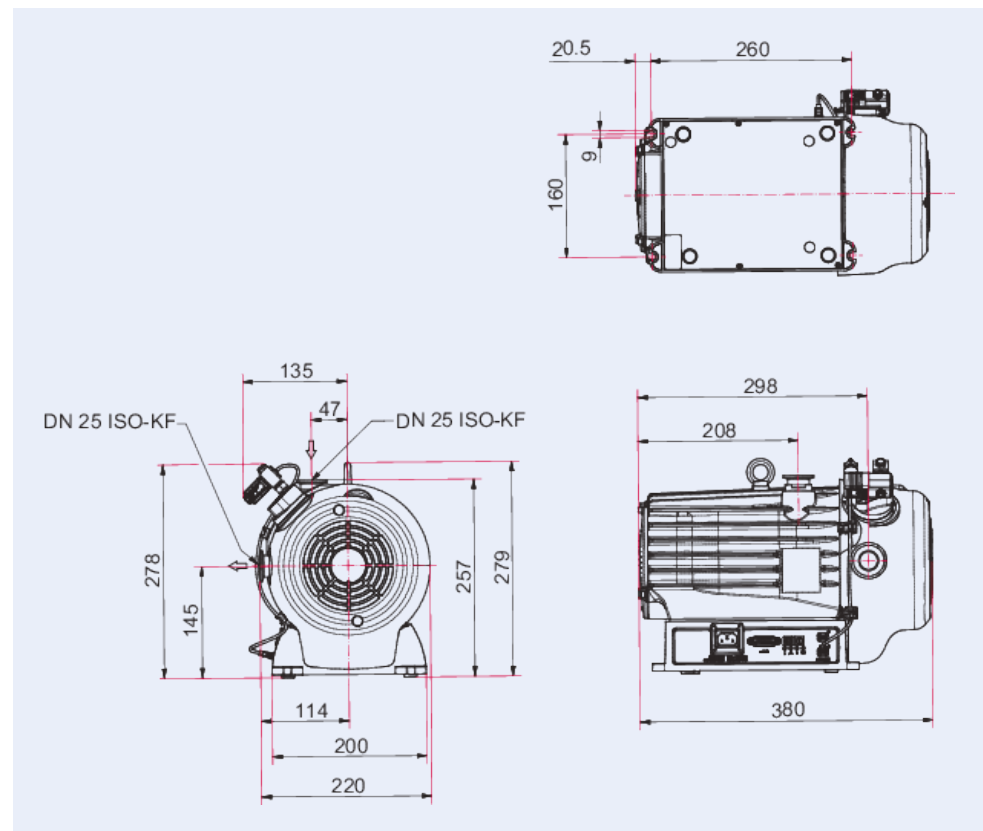

Technical Data	HiScroll 6, scroll pump, with automated gas ballast
Gas ballast	Yes
Cooling method	Air (Forced convection)
Motor type	1-phase motor
Motor protection	Internal
I/O interfaces	RS485
Ambient temperature	5 – 40 °C
Certification	Semi S2 compatible Semi S8 compatible cTUVus certified according to UL / CSA 61010-1
Weight	19 kg 41.89 lb
Pumping speed	6.1 m ³ /h
Input voltage(s)	100 – 127 / 200 – 240 V AC (±10 %), 50/60 Hz
Emission sound pressure level (EN ISO 2151)	≤48 dB(A)
Gas ballast pressure	1,500 hPa 1,125 Torr 1,500 mbar
Ultimate pressure	1.5 · 10 ⁻² hPa 1.125 · 10 ⁻² Torr 1.5 · 10 ⁻² mbar
Ultimate pressure for gas ballast stage 1	7 · 10 ⁻² hPa 5.25 · 10 ⁻² Torr 7 · 10 ⁻² mbar
Ultimate pressure for gas ballast stage 2	4 · 10 ⁻¹ hPa 3 · 10 ⁻¹ Torr 4 · 10 ⁻¹ mbar
Tested base pressure	1.5 · 10 ⁻² hPa 1.125 · 10 ⁻² Torr 1.5 · 10 ⁻² mbar
Exhaust pressure, max.	1,500 hPa 1,125 Torr 1,500 mbar
Switch	Yes
Rotation speed	1000 – 3000 rpm
Nominal rotation speed	2,500 rpm 2,500 min ⁻¹
Gas ballast flow stage 1	0.6 m ³ /h 0.353 cfm 10 l/min
Gas ballast flow stage 2	0.9 m ³ /h 0.53 cfm 15 l/min
Operating altitude, max.	3,000 m
Intake pressure max.	1,100 hPa 825 Torr 1,100 mbar
Mains cable	No
Dimensions (L x W x H)	380 x 242 x 278 mm
Connection flange (in)	DN 25 ISO-KF
Connection flange (out)	DN 25 ISO-KF

Order number	HiScroll 6, scroll pump, with automated gas ballast
HiScroll 6, scroll pump, with automated gas ballast	PD S10 002

Accessories	HiScroll 6, scroll pump, with automated gas ballast
Maintenance kit tip seal for HiScroll 6	PD E10 000 -T
Valve kit for HiScroll 6/12/18	PD E13 000 -T
Spare parts kit - cover+fan for HiScroll 6	PD E15 000 -T



Errors and/or changes excepted. - 4/2/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum GmbH

Germany

T +49 6441 802-0

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 