




**SAS 63, dust separator,  
DN 63 ISO-K**

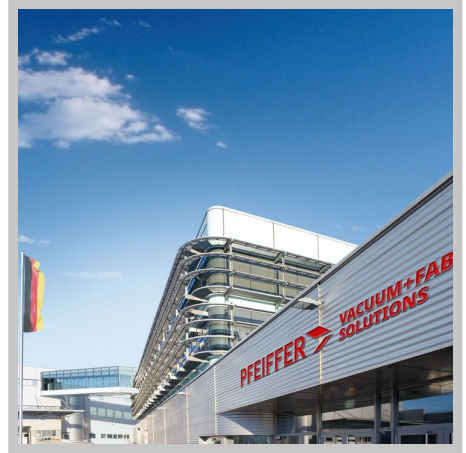

**PFEIFFER** ➤

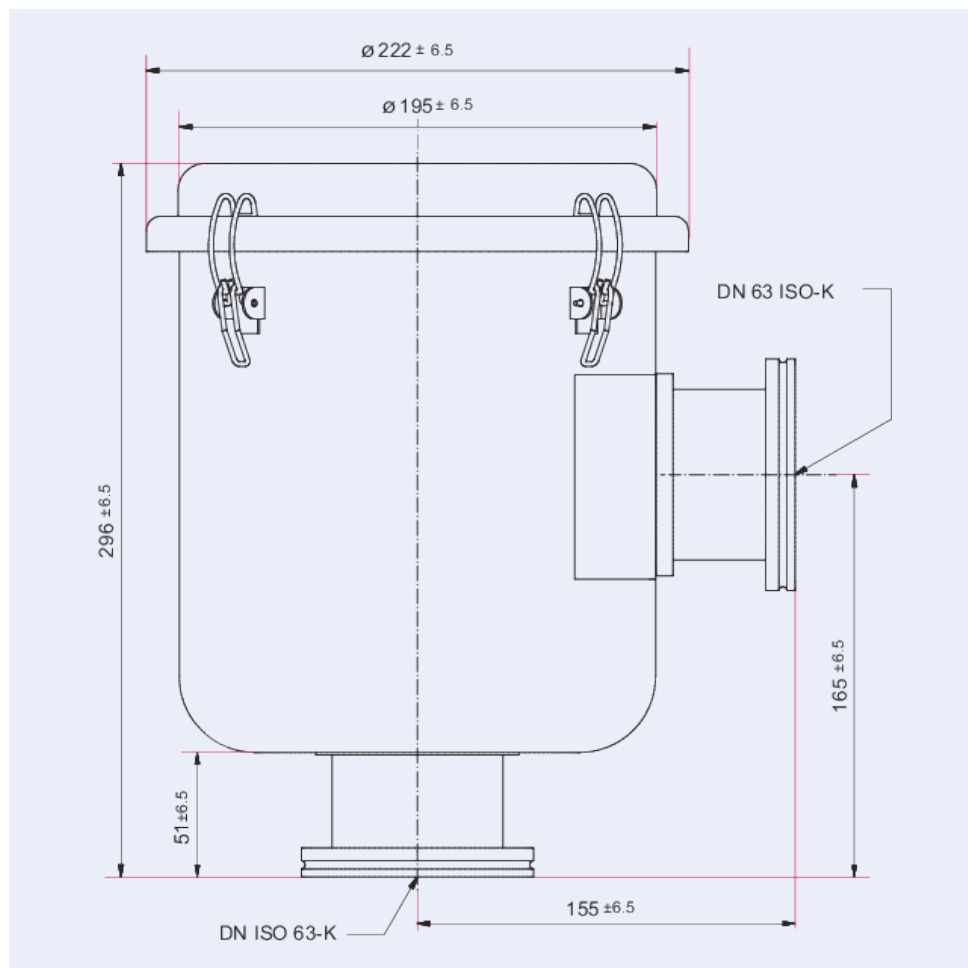


Illustration only

## **SAS 63, dust separator, DN 63 ISO-K**

- For the inlet flange
- Protects the pump against particles from the process
- Customer benefit: Longer service life of mechanical parts

## Dimensions



| Technical Data                       | SAS 63, dust separator, DN 63 ISO-K                    |
|--------------------------------------|--------------------------------------------------------|
| Temperature range (vacuum side) min. | -26 °C                                                 |
| Temperature range (vacuum side) max. | 104 °C                                                 |
| For pumping speed up to              | 360 m <sup>3</sup> /h                                  |
| Temperature range (vacuum side)      | 26 – 104 °C                                            |
| Grain size limit (separable)         | 5 µm                                                   |
| For pumping speed up to              | 493 m <sup>3</sup> /h   290.1798 cfm   8,216.831 l/min |
| Conductance at 1 hPa                 | 660 l/s                                                |
| Conductance at 100 hPa               | 3,100 l/s                                              |
| Weight                               | 5.9 kg   13.01 lb                                      |
| Conductance at 1 hPa                 | 2,500 l/s                                              |
| Conductance at 100 hPa               | 20,000 l/s                                             |
| Degree of separation                 | 99.7 %                                                 |
| Connection flange                    | DN 63 ISO-F / DN 63 ISO-K                              |
| Inlet pressure max.                  | Atmospheric pressure                                   |
| Weight                               | 5.95 kg                                                |
| Connection flange (in)               | DN 63 ISO-F                                            |
| Connection flange (out)              | DN 63 ISO-K                                            |

| Order number                        | SAS 63, dust separator, DN 63 ISO-K |
|-------------------------------------|-------------------------------------|
| SAS 63, dust separator, DN 63 ISO-K | PK Z60 511                          |



Errors and/or changes excepted. - 2/21/2025

**Are you looking for an optimum vacuum solution?**

**Talk to us:**

**Pfeiffer Vacuum GmbH**

**Germany**

**T +49 6441 802-0**

**Or scan the barcode, to visit our web page:**



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

**Follow Us On Social Media**

**#pfeiffervacuum**



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 